

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number
WO 2004/030238 A1

(51) International Patent Classification⁷: **H04B 7/06**,
H04Q 7/22

(21) International Application Number:
PCT/IB2003/003985

(22) International Filing Date:
12 September 2003 (12.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0222555.5 28 September 2002 (28.09.2002) GB

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MOULSLEY, Timothy, J.** [GB/GB]; c/o Philips Intellectual Property & Standards, Cross Oak Lane, Redhill, Surrey RH1 5HA (GB).

BAKER, Matthew, P., J. [GB/GB]; c/o Philips Intellectual Property & Standards, Cross Oak Lane, Redhill, Surrey RH1 5HA (GB). **CAMERON, Alistair, S.** [GB/GB]; c/o Philips Intellectual Property & Standards, Cross Oak Lane, Redhill, Surrey RH1 5HA (GB).


(74) Agent: **WHITE, Andrew, G.**; Philips Intellectual Property & Standards, Cross Oak Lane, Redhill, Surrey RH1 5HA (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: PACKET DATA TRANSMISSION IN A MIMO SYSTEM

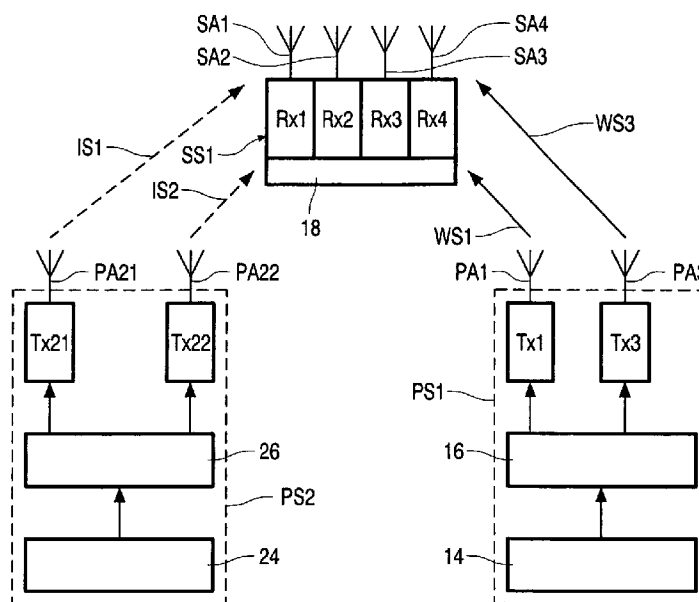

(57) Abstract: A packet data transmission system comprises primary stations (PS) having signal transmitting and receiving means and antennas (PA1 to PA4) for propagating downlink signals and receiving uplink signals and a plurality of secondary stations (SS) able to roam within the coverage areas of the primary stations. Each secondary station (SS1) has signal transmitting and receiving means, a predetermined number of antennas (SA1 to SA4), and means for monitoring its radio environment. Information about the radio environment is relayed as an uplink signal to the respective primary station which modifies its mode of transmission of packet data signals. The secondary station in response to the modified mode of transmission of the downlink signals adapts its receiver resources to process the packet data signals and effect cancellation of any interference.

WO 2004/030238 A1



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

DESCRIPTION

PACKET DATA TRANSMISSION IN A MIMO SYSTEM

5 The present invention relates to a packet data transmission system and further relates to primary and secondary stations for use in such a system and to a method of operating such a system. The present invention has particular, but not exclusive, application to UMTS (Universal Mobile Telecommunication System) otherwise referred to as 3GPP.

10

 For packet radio in UMTS it has been proposed for High Speed Downlink Packet Access (HSDPA) that MIMO (Multiple Input Multiple Output antenna systems) be used. One example of a MIMO system is described in United States Patent 6,067,290 in which the presence of multiple antennas
15 enables spatial multiplexing whereby a data stream for transmission is split into a plurality of sub-streams, each of which is sent via many different paths. Another example, known as the BLAST system, is described in the paper "V-BLAST: an architecture for realising very high data rates over the rich-scattering wireless channel" by P W Wolniansky et al in the published papers
20 of the 1998 URSI International Symposium on Signals, Systems and Electronics, Pisa, Italy, 29 September to 2 October 1998.

 The performance gains which may be achieved from a MIMO system may be used to increase the total data rate at a given error rate, or to reduce the error rate for a given data rate, or some combination of the two. A MIMO
25 system can also be controlled to reduce the total transmitted energy or power for a given data rate and error rate.

 One area in which MIMO techniques may be applied is a High-Speed Downlink Packet Access (HSDPA) scheme, which is currently being developed for UMTS and which may facilitate transfer of packet data to a secondary
30 station, for example a mobile station, at over 4Mbps. In one proposed embodiment of HSDPA separate data streams using the same channelisation code are sent from respective antennas at a primary station, for example a

base station, and the data streams can in principle be received and decoded by a secondary station having at least as many antennas as there are data streams. An ARQ (Automatic Repeat reQuest) scheme is needed to ensure correct delivery of each data packet, since accurate data transmission is
5 viewed as more important than the reduced system throughput under poor channel conditions (due to multiple re-transmissions).

A problem with the use of a MIMO system for packet data transmission is the impact of differing radio link qualities on the communication system. The scheme can perform well with low interference levels but not with high
10 interference levels such as will occur near a cell border where interference from primary stations in adjacent cells will greatly reduce throughput.

It is an object of the present invention to mitigate the effect of such interference in packet data transmission.

15 According to a first aspect of the present invention there is provided a method of operating a packet data transmission system comprising a primary station having a plurality of antennas and at least one secondary station having a plurality of antennas, the method comprising the primary station transmitting packet data on signal paths between pairs of primary and
20 secondary station antennas, the secondary station monitoring its radio environment and sending information about its radio environment to the primary station, the primary station in response to this information adapting itself and the secondary station configuring its receiver resources for processing the received data and interference.

25 According to a second aspect of the present invention there is provided a packet data transmission system comprising a primary station having a plurality of antennas, signal transmitting and receiving means and means for adapting itself in response to a received signal from a secondary station, and at least one secondary station having signal transmitting and receiving means,
30 a plurality of antennas, means for monitoring its radio environment and for transmitting a signal including information about its radio environment, and

means for configuring its receiver resources for processing data signals received from the adapted primary station and interference.

The present invention is based on recognition of the fact that some of the receiver resources in a secondary station designed to receive MIMO
5 transmissions can be used for interference cancellation. However the allocation of these resources depends on the interference conditions at the secondary station, which conditions vary for example due to the current position of the secondary station in its cell and the proximity of an interfering primary station in an adjacent cell. Therefore the secondary station monitors
10 the conditions and makes a decision as to what resources, for example number or choice of its antennas, it would prefer to use to receive packet data from the primary station and notifies the primary station by way of uplink signalling. Some or all of the receiver's resources not allocated in this way may be used in interference cancellation of signals from primary station(s) in
15 adjacent cells. However the decision concerning the allocation of resources is dynamic in so far that it is likely to be changed due to the conditions varying.

According to a third aspect of the present invention there is provided a secondary station for use in a packet data transmission system comprising a primary station having a plurality of antennas and signal transmitting and
20 receiving means, the secondary station having signal transmitting and receiving means, a plurality of antennas and means for monitoring its radio environment and for transmitting a signal including information about its radio environment, and means for configuring its receiver resources for processing received data signals and interference.

25 According to a fourth aspect of the present invention there is provided a primary station for use in a packet data transmission system, the primary station comprising a plurality of antennas, signal transmitting and receiving means, and means responsive to a received signal from a secondary station for adapting the mode of transmission of the signals transmitted to the
30 secondary station.

The present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

Figure 1 is a diagram of a cellular communications system;

5 Figure 2 is a block schematic diagram of a MIMO system without interference;

Figure 3 is a block schematic diagram of a MIMO system with interference;

10 Figure 4 is a block schematic diagram of a MIMO system with interference cancellation by a secondary station;

Figure 5 is a block schematic diagram of a simplified MIMO system with Interference cancellation; and

Figure 6 is a flow chart illustrating an embodiment of the method in accordance with the present invention.

15 In the drawings the same reference numerals have been used to indicate corresponding features.

Referring to Figure 1, the illustrated cellular communications system comprises primary stations PS1, PS2, PS3, each of which consists of a plurality of antennas for use in MIMO transmission of data packets on a downlink channel in accordance with a transmission system such as HSDPA and a receiver for receiving uplink signals. The primary stations will be described in greater detail later with reference to Figure 2. The radio coverage areas C1, C2, C3, termed cells, of the primary stations are determined in part by topographical features which affect signal propagation. For convenience of illustration the cells are shown as equal sized regular hexagons.

20 Secondary stations SS1 and SS2 are able to roam within the overall coverage area determined by the cells C1, C2, C3. Each secondary station SS1, SS2 comprises a plurality of antennas which may be used for MIMO reception and a transmitter for sending uplink signals.

30 The operation of the cellular communications system is conducted in accordance with a standard such as UMTS, details of which are incorporated

by way of reference. Consequently aspects such as handover will not be discussed in the present specification as they are not relevant to the understanding of the present invention.

Taking the secondary station SS1 as an example, as it roams within the cell C1, the quality of reception of the MIMO signals transmitted by the primary station PS1 will vary according to not only the distance from the primary station PS1 but also the distance from the primary station PS2 in the adjoining cell C2. As the secondary station SS1 approaches the notional boundary between the cells C1,C2 the level of interfering signals 10 transmitted by the primary station PS2 increases and has an adverse effect on the reception quality of the wanted signal 12 received from the primary station PS1. Effective interference cancellation of the interfering signals 10 can be implemented by the secondary station SS1 because the format of the signals 10 is known.

Referring to Figure 2, the illustrated example of a MIMO system comprises a primary station PS1 having a single source 14 of data coupled to a multiplexer 16 having four outputs coupled to respective transmitters Tx1, Tx2, Tx3, Tx4, each having its own antenna PA1, PA2, PA3, PA4. In operation separate packet data streams using the same channelisation code may be transmitted on a downlink by respective ones of the transmitters Tx1 to Tx4. Although not shown in the drawing, the primary station has a receiver for receiving uplink signals and a processor for controlling the operation of the primary station PS1.

An in-range secondary station SS1 present in the same cell as the primary station PS1 receives the separate packet data streams, decodes them and combines the decoded data. As an example, the secondary station SS1 comprises as many radio receivers Rx1, Rx2, Rx3, Rx4 as there are transmitters Tx1 to Tx4. Each of the receivers Rx1 to Rx4 has its own antenna SA1 to SA4. The received signals are passed to a processing stage 18 which recovers the transmitted packet data streams and recombines the data. The processing stage 18 also causes other functions to be carried-out such as monitoring the quality of the downlink channels, selecting modes of operation

of the antennas SA1 to SA4 and their associated receivers Rx1 to Rx4 and the transmitting of uplink signals by way of a transmitter, not shown.

In the simplest case, each data stream is mapped to a separate one of the antennas PA1 to PA4, which is appropriate for spatially uncorrelated radio channels. However the mapping may take into account the quality of the
5 downlink path between each pair of the antennas, that is one of antennas PA1 to PA4 and one of antennas SA1 to SA4.

Referring to Figure 3 which shows a 4 X 4 MIMO arrangement, wanted downlink signals WS1 to WS4 are subject to the combined power of two
10 interferers (or interfering signals) IS1, IS2 produced by transmitters Tx21 and Tx22 of a primary station PS2 located in an adjacent cell. For the sake of completeness, the primary station PS2 includes a data source 24 coupled to a multiplexer 26 which supplies respective data streams to the transmitters Tx21, Tx22, each of which has an antenna PA21, PA22.

15 The combined power of the two interferers IS1, IS2 degrades the combined wanted signal received at the secondary station SS1. In order to reduce, and preferably eliminate, the effect of these interferers, some of the receiver resources are allocated to interference cancellation. This is shown in Figure 4.

20 In general the number of interference sources which can be cancelled by for example linear combination of antenna outputs is equal to the number of receiver antennas minus the number of wanted signals to be received. In Figure 4 the secondary station SS1 has configured its receiver resources for receiving wanted downlink signals WS1 and WS3 from transmitters Tx1 and
25 Tx3 of the primary station PS1 and is also cancelling interference from the interferers IS1, IS2.

In selecting transmitted signals for reception and interferers for cancellation, the secondary station SS1 may use one or more criteria determined by the secondary station SS1, for example, (1) level of interference
30 in channels between pairs of interfering transmitter and receiver antennas, (2) the transfer functions of channels between pairs of transmitter and receiver antennas, (3) channel quality for selected transmission formats, (4) the

secondary station selecting the antenna coefficients for virtual antennas in order to optimise some parameter or parameters (for example minimise interference, maximise expected throughput), and (5) the number (or effective number) of receive antennas at the secondary station being a dynamic
5 quantity.

Once the secondary station has made a contemporaneous decision how it would like to allocate its receiver resources it transmits the relevant information as an uplink signal. The relevant information can take a multitude of forms, for example, (a) interference level at each of the receiver antennas
10 SA1 to SA4, (b) the interference level defined with respect to a reference, where the reference for interference could be one receive antenna, (c) interference information for selected antennas only, (d) any one of (a) to (c) above with selection of antennas based on interference (for example, lowest interference level), (e) any one of (a) to (c) above with selection of antennas
15 based on interference after cancellation (for example lowest interference level after cancellation using one or more spare receive antennas), (f) the transfer function between each pair of transmit and receive antennas, where the transfer function could be limited to a single complex number, (g) transfer function normalised with respect to interference level at a receiving antenna,
20 (h) transfer function defined with respect to a reference, where the reference for transfer function could be one antenna pair, (i) transfer function information for selected pairs of antennas only, (j) any one of (f) to (i) above with the selection of antenna pairs based on transfer function (for example, lowest path loss), (k) transfer function normalised with respect to interference level at the
25 receiving antenna, after cancellation, (l) any one of (f) to (k) above with selection of antenna pairs based on transfer functions after interference cancellation, (m) the channel quality for each antenna pair for each possible transmission format and allocation of resources, (n) channel quality defined in terms of SNR for each antenna pair, (o) channel quality defined in terms of bit
30 rate achievable (that is code rate), (p) channel quality defined in terms of a recommended transmission format, (q) channel quality information for selected transmission formats only, (r) any of (m) to (q) above with selection of

transmission formats based on expected throughput, (s) any of (m) to (q) above with selection of transmission formats from among a sub-set of possible formats, (t) any of the above with receive antennas as "virtual antennas" derived from linear combinations of signals from real antennas at the secondary station, (u) any of the above with the number of virtual antennas less than or equal to the number of real antennas, (v) any of the above with the secondary station selecting the coefficients to obtain virtual antennas in order to optimise some parameter or parameters (for example minimise interference, maximise expected throughput), (w) any or none of the above where the number of receive antennas the secondary station indicates to the primary station depends on channel conditions, (x) maximum desired number of receivable transmission antennas, and (y) specific selection of transmit antennas.

The primary station in response to the uplink signals may adapt (1) the transmission scheme in general (for example space time coding, diversity, MIMO techniques, mapping of data to antennas, power allocation), (2) the number of transmit antennas used, (3) the allocation of the transmit antennas, and (4) allocation of (unused) antennas to signals for other users.

Depending on the desired speed of response by the primary station, at least part of the relevant information could be signalled at the physical layer which will produce a faster response than using say the protocol layer.

Figure 5 illustrates a simplified MIMO system with interference cancellation. In order to illustrate the operation of the interference cancellation scheme mathematically the wanted signal is referenced "s", the interfering signal is referenced "i", and the secondary station antennas are referenced "A" and "B", respectively.

The channel transfer functions are: h_{iA} , h_{iB} , h_{sA} and h_{sB} .

If the received signals at antennas A and B are combined with weights "1" and "a", respectively, the receiver output is:

$$s \cdot h_{sA} + i \cdot h_{iA} + s \cdot a \cdot h_{sB} + i \cdot a \cdot h_{iB}$$

With no noise, interference cancellation is obtained by choosing:

$$a = -h_{iA}/h_{iB}$$

In this case the wanted signal would be:

$$s(h_{sA} - (h_{sB} \cdot h_{iA}/h_{iB}))$$

The channel coefficients could be obtained by measurement of pilot symbols from each of the antennas. This approach can be extended to
5 calculation of optimum combining weights in the presence of noise, and with more than one transmitter antenna in operation.

In applying this concept to a combination of MIMO and HSDPA in a system such as UMTS, the primary station would select the modulation, coding scheme and other relevant characteristics to be used in the downlink for
10 transmission to a predetermined secondary station. This selection would take into account channel information provided by the secondary station. In making the selection the primary station would decide on the use of one or more antennas and whether MIMO (or other diversity techniques) would be used.

The channel information could be provided in terms of the received
15 (complex) amplitude of the pilot symbols sent from the primary station, together with the interference level at the secondary station. Optionally it is possible to normalise the pilot amplitude by the interference level, allowing for different interference at each antenna.

If the primary station is to make the decision on how many transmit
20 antennas to use, it would need to know all of the channel coefficients (including those for the interferer) as well as the capability of the secondary station to cancel interference. This would require a significant signalling load.

Allowing the secondary station to make all or some of the decisions would reduce the potential signalling load.

25 If a particular signalled pilot amplitude is assigned to indicate a low or zero pilot amplitude, this value could also be used by the mobile to indicate that the corresponding antenna should not be used for transmission. This would allow the secondary station to at least partly determine how many transmit antennas are to be used by the primary station. Therefore the
30 secondary station could ensure that it had sufficient resources to carry out interference cancellation (if needed).

In another situation, if full MIMO is applied (using all the receiver antennas), the secondary station might determine that only part of the downlink data can be reliably recovered. If so, the secondary station may be able to use the resulting extra degree(s) of freedom to cancel interference.

5 Referring to Figure 6, the flow chart comprises a block 30 which relates to a secondary station making measurements about its radio environment which measurements include measuring the channel characteristics between each path of the channel and measuring the characteristics of the interferers. Block 32 relates to the secondary station sending information about the
10 measurements made to a primary station. This information may also include a recommendation on the transmission format to be used and/or the number of antennas or a specific choice of antennas or subset of antennas. Block 34 relates to the primary station making a decision on the transmission format and/or antennas to be used. In one example of making a decision the primary
15 station follows the recommendation of the secondary station which has the advantage of reducing the amount of downlink signalling that may be necessary. In another example the primary station informs the secondary station what it is going to do which may be part or all of the secondary station's recommendation. Finally block 36 relates to the secondary station deciding
20 what to do with the received transmissions and interference and configuring its receiver resources accordingly.

Depending on the implementation of the MIMO system the secondary station may have more or less autonomy in the decision making.

25 Although the present invention is aimed at a FDD mode of operation it can be applied to a TDD mode if the uplink and downlink channel use different time slots at the same frequency. In the TDD mode the channel will be reciprocal and the need for the signalling of channel information reduced.

The roles performed by a primary station in the above description may in practice be the responsibility of a variety of parts of the fixed infrastructure,
30 for example a "Node B", which in UMTS is the part of the fixed infrastructure directly interfacing with a secondary station, or at a higher level in the Radio Network Controller (RNC). In this specification, the use of the term "primary

station” should therefore to be understood to include the parts of the network fixed infrastructure involved in an embodiment of the present invention.

Although the description above relates to certain roles for a primary station and a secondary station, it will be understood that these roles may be reversed in some embodiments of the present invention.

In the present specification and claims the word “a” or “an” preceding an element does not exclude the presence of a plurality of such elements. Further, the word “comprising” does not exclude the presence of other elements or steps than those listed.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of packet data transmission systems and component parts thereof and which may be used instead of or in addition to features already described herein.

CLAIMS

1. A method of operating a packet data transmission system
5 comprising a primary station (PS 1) having a plurality of antennas (PA1 – PA4)
and at least one secondary station (SS1) having a plurality of antennas (SA1 –
SA4), the method comprising the primary station (PS1) transmitting packet
data on signal paths between pairs of primary and secondary station
antennas, the secondary station (SS1) monitoring its radio environment and
10 sending information about its radio environment to the primary station, the
primary station (PS1) in response to this information adapting itself and the
secondary station (SS1) configuring its receiver resources (RX1 – RX4) for
processing the received data and interference.
- 15 2. A method as claimed in claim 1, characterised in that the
secondary station (SS1) recommends to the primary station (PS 1) how it
should adapt itself.
3. A method as claimed in claim 2, characterised in that the
20 secondary station (SS1) recommends that the primary station (PS 1) use a
particular subset of antennas for transmitting packet data.
4. A method as claimed in claim 2 or 3, characterised in that the
secondary station (SS 1) recommends the maximum desired number of
25 receivable transmission antennas to be used by the primary station (PS 1).
5. A method as claimed in any one of claims 2 to 4, characterised in
that the secondary station (SS 1) recommends the transmission format to be
used by the primary station (PS1).

6. A method as claimed in any one of claims 2 to 5, characterised in that the primary station (PS1) adapts itself as recommended by the secondary station (SS1).

5 7. A method as claimed in any one of claims 1 to 6, characterised in that the secondary station (SS1) determines the resources to be used for receiving packet data and the resources to be used for interference suppression.

10 8. A method as claimed in any one of claims 1 to 7, characterised in that the secondary station (SS1) monitors the transfer function of the paths between the primary and secondary stations antennas (PA1 – PA4, SA1 – SA4).

15 9. A method as claimed in any one of claims 1 to 8, characterised in that the information about the radio environment of the secondary station (SS1) includes characteristics of the interference present at one or more antennas (SA1 – SA4) of the secondary station (SS1).

20 10. A packet data transmission system comprising a primary station (PS1) having a plurality of antennas (PA1 – PA4), signal transmitting (TX1 – TX4) and receiving means (16) and means for adapting itself in response to a received signal from a secondary station (SS1), and at least one secondary station (SS1) having signal transmitting and receiving means (RX1 – RX4), a
25 plurality of antennas (SA1 – SA4), means (18) for monitoring its radio environment and for transmitting a signal including information about its radio environment, and means (18) for configuring its receiver resources (RX1 – RX4) for processing data signals received from the adapted primary station (PS1) and interference.

30

11. A system as claimed in claim 9, characterised in that the monitoring means (18) comprises means (18) for determining the transfer

functions of the radio paths between the primary station and secondary stations.

12. A secondary station (SS1) for use in a packet data transmission
5 system comprising a primary station (PS1) having a plurality of antennas (PA1 – PA4) and signal transmitting (TX1 – TX4) and receiving means, the secondary station (SS1) having signal transmitting and receiving (RX1 – RX4) means, a plurality of antennas (SA1 – SA4) and means (18) for monitoring its radio environment and for transmitting a signal including information about its
10 radio environment, and means (18) for configuring its receiver resources (RX1 – RX4) for processing received data signals and interference.

13. A primary station (PS1) for use in a packet data transmission system, the primary station (PS1) comprising a plurality of antenna (PA1 –
15 PA4), signal transmitting (TX1 – TX4) and receiving means, and means (16) responsive to a received signal from a secondary station (SS1) for adapting the mode of transmission of the signals transmitted to the secondary station.

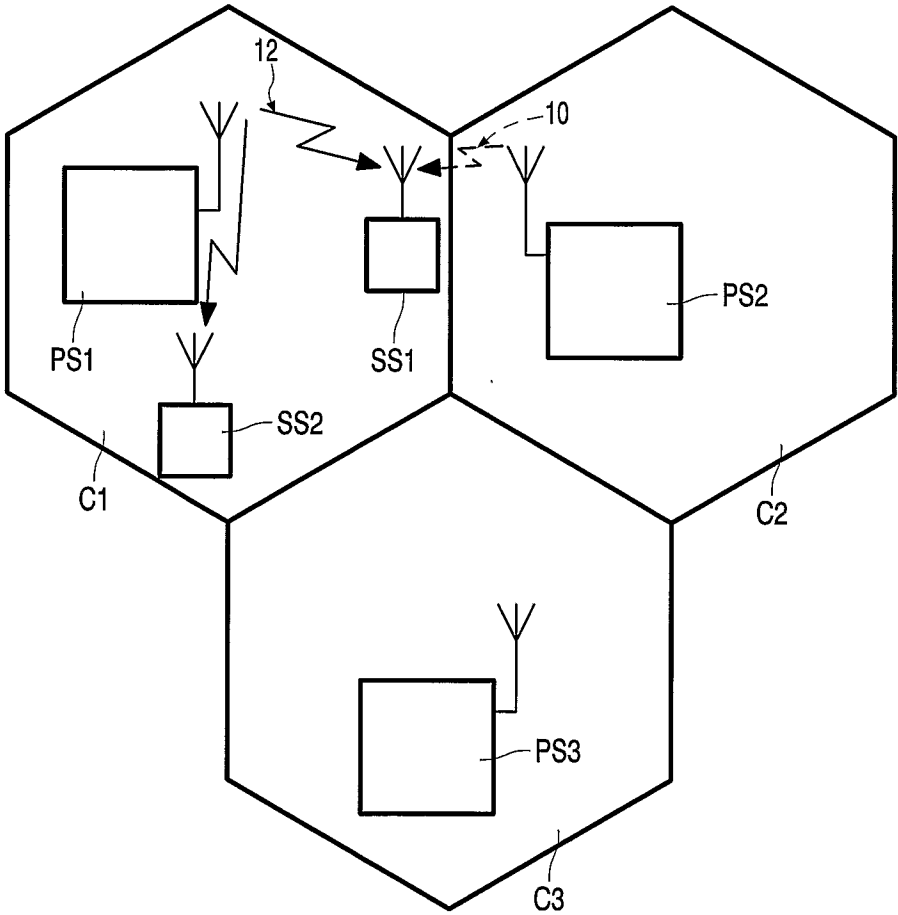


FIG.1

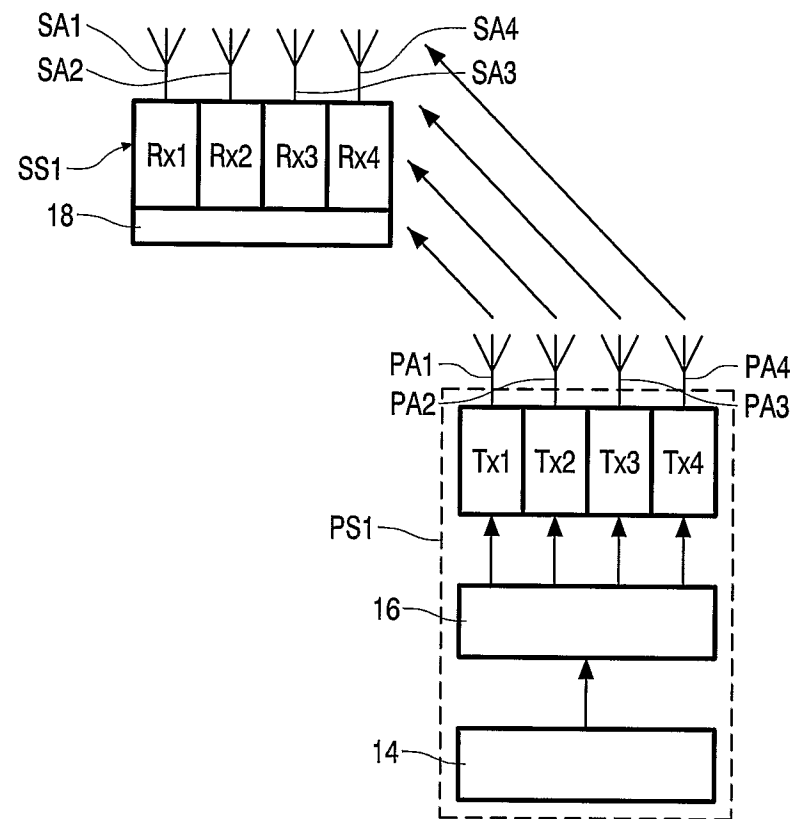


FIG.2

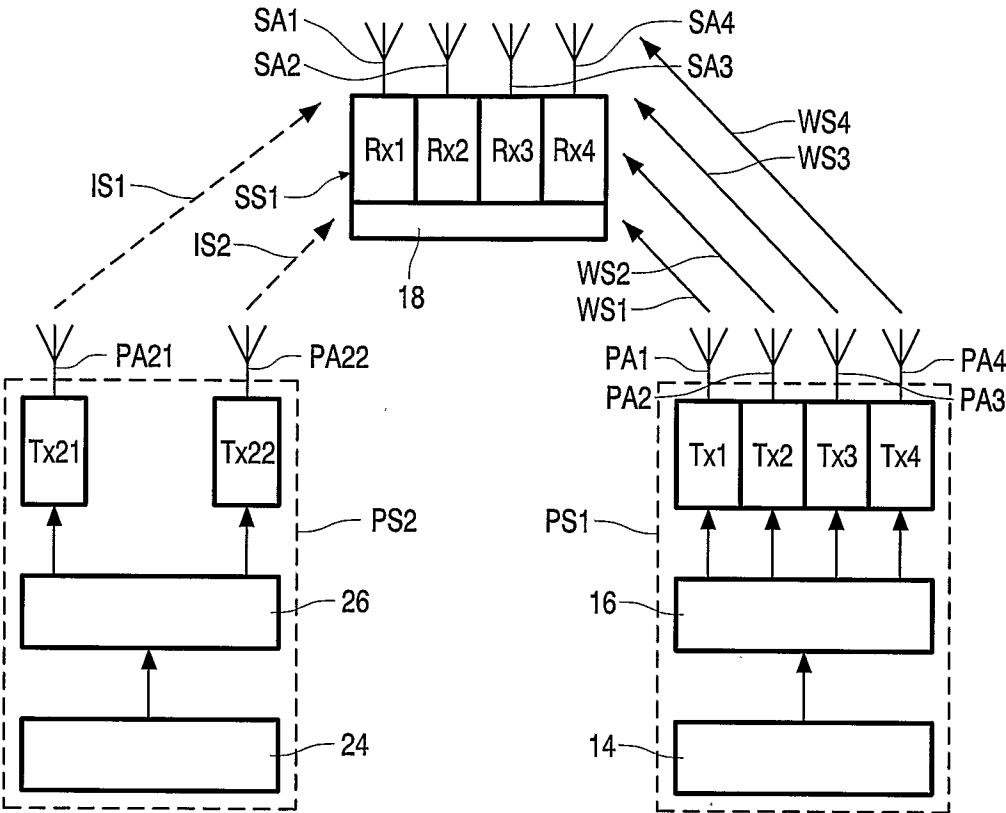


FIG.3

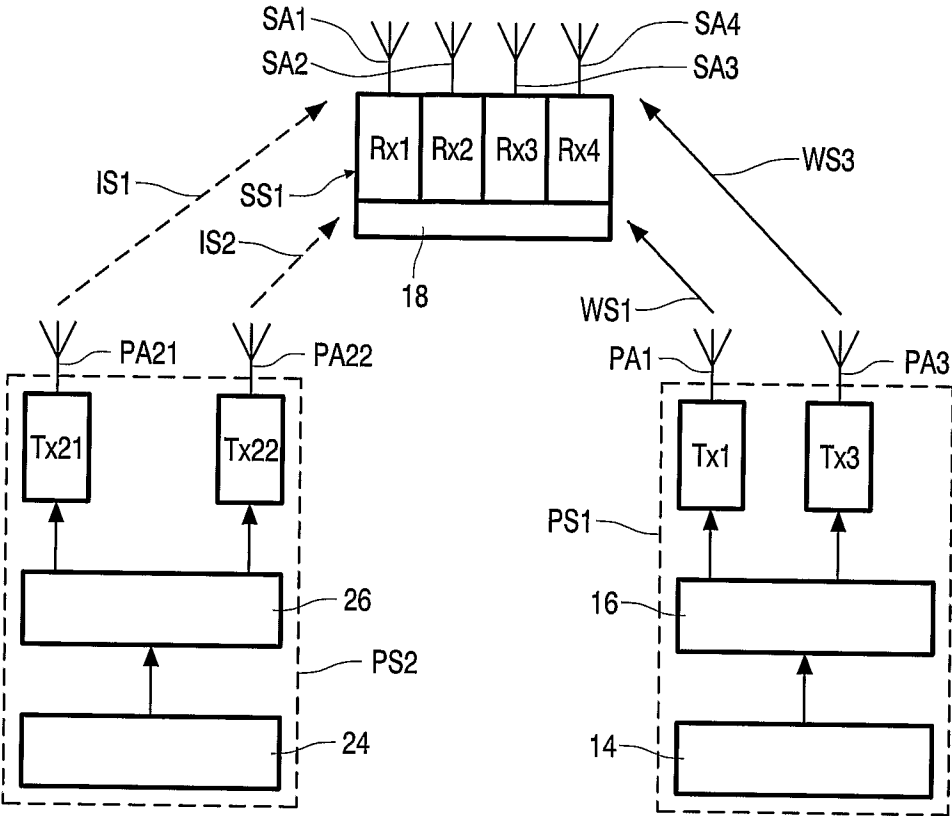


FIG.4

5/5

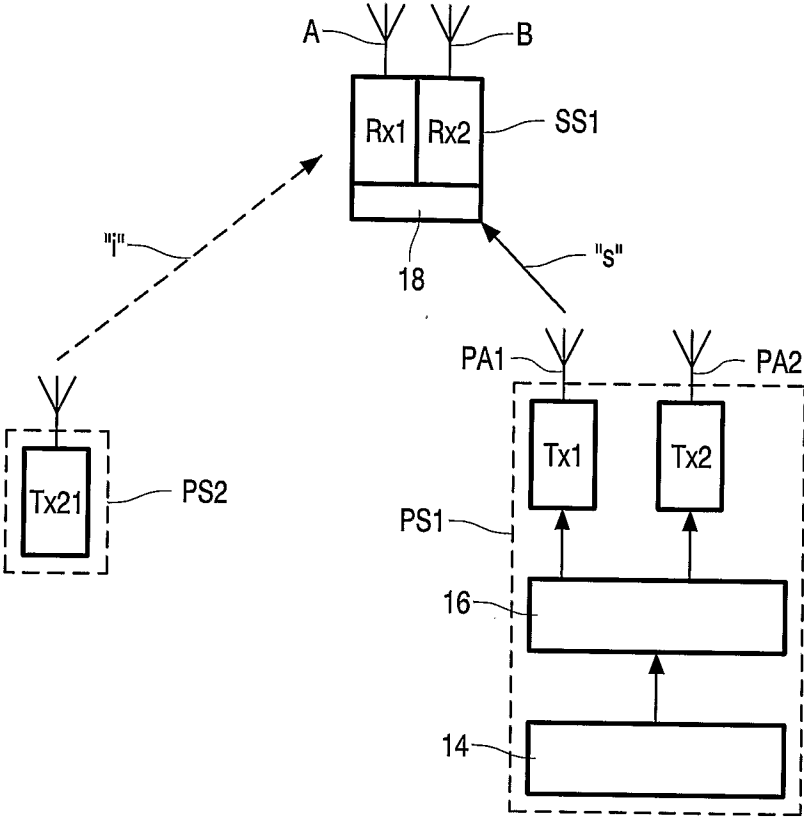


FIG.5

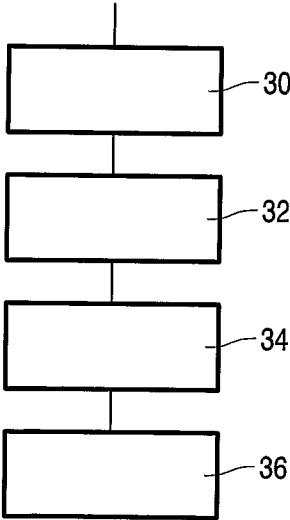


FIG.6

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H04B7/06 H04Q7/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04B H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 01 76110 A (QUALCOMM INC) 11 October 2001 (2001-10-11) abstract page 2, line 8 - line 22 page 3, line 6 - line 24 page 4, line 11 - line 14 page 5, line 3 - page 6, line 10 page 14, line 16 - page 15, line 15 page 16, line 10 - line 14 figure 1	1-13
Y	EP 1 207 645 A (LUCENT TECHNOLOGIES INC) 22 May 2002 (2002-05-22) abstract column 3, line 19 - line 39 column 5, line 18 - line 34 figure 1	1-13
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

13 November 2003

Date of mailing of the international search report

04/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Rabe, M

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 211 820 A (LUCENT TECHNOLOGIES INC) . 5 June 2002 (2002-06-05) abstract column 1, line 51 -column 2, line 13 column 2, line 50 -column 3, line 33 column 4, line 15 - line 37 ---	1-13
A	SANDHU S ET AL: "Near-optimal selection of transmit antennas for a MIMO channel based on shannon capacity" IEEE 2000, vol. 1, 29 October 2000 (2000-10-29), pages 567-571, XP010535430 paragraphs 1., 2. and 5. figure 1 -----	1-13

INTERNATIONAL SEARCH REPORT

PCT/IB 03/03985

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
WO 0176110	A	11-10-2001	US	6473467 B1	29-10-2002
			AU	4592101 A	15-10-2001
			CA	2402152 A1	11-10-2001
			EP	1269665 A2	02-01-2003
			JP	2003530010 T	07-10-2003
			NO	20024634 A	20-11-2002
			TW	508922 B	01-11-2002
			WO	0176110 A2	11-10-2001
EP 1207645	A	22-05-2002	CA	2361886 A1	16-05-2002
			CN	1354610 A	19-06-2002
			EP	1207645 A1	22-05-2002
			JP	2002217752 A	02-08-2002
EP 1211820	A	05-06-2002	US	2002068611 A1	06-06-2002
			EP	1211820 A1	05-06-2002